



The
Patent
Office

PCT / IB 99 / 0 14 12

02.09.99



INVESTOR IN PEOPLE

IB 99/1412

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D	03 SEP 1999
WIPO	PCT

09/744612

4
The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


#6
J. J. J.
6/22/01

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely substitutes the company to certain additional company law rules.

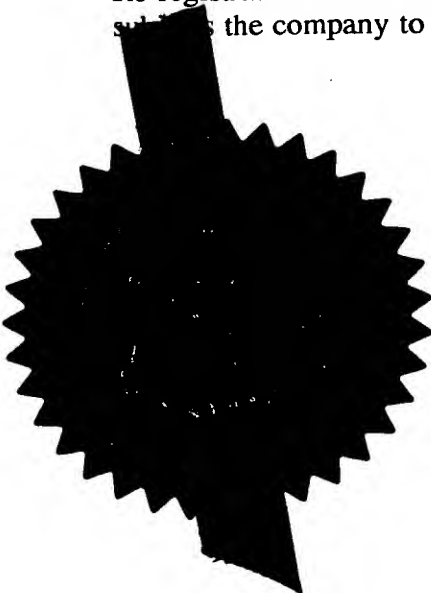

Signed

Dated

G. D. Court.

20 AUG 1999



Patents Act 1977
(Rule 16)


The
Patent
Office

29 JUL 98 E379280-4 002825
P01/7700 25 00 9816447.8
The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

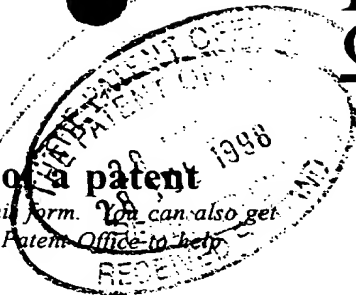

1. Your reference **88164/PRS/VU**

2. Patent a **9816447.8** **28 JUL 1998**
(The Patent)

3. Full name, address and postcode of the or of each applicant (underline all surnames)
**NOKIA TELECOMMUNICATIONS OY
KEILALAHDENTIE 4
FIN-02150 ESPOO
FINLAND**

Patents ADP number (if you know it)

6208193006

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention **INTER-SYSTEM HANDOVER**

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)
**PAGE WHITE & FARRER
54 DOUGHTY STREET
LONDON
WC1N 2LS
UNITED KINGDOM**

Patents ADP number (if you know it)

1255003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body
See note (d)) **YES**

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	9
Claim(s)	2 <i>28 1</i>
Abstract	1
Drawing(s)	6 <i>16</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

P. R. Slingsby
28 JULY 1998

12. Name and daytime telephone number of person to contact in the United Kingdom

P R SLINGSBY

0171 831 7929

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) *If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- b) *Write your answers in capital letters using black ink or you may type them.*
- c) *If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- d) *If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- e) *Once you have filled in the form you must remember to sign and date it.*
- f) *For details of the fee and ways to pay please contact the Patent Office.*

INTER-SYSTEM HANDOVER

This invention relates to a system of handover for mobile stations, for example in a cellular radio telecommunications network.

Figure 1 shows schematically the configuration of a typical cellular radio telecommunications network. The network comprises a number of base-stations (BSs) 1, 2, 3 etc. Each base-station has a radio transceiver capable of transmitting radio signals to and receiving radio signals from the area of a cell 4, 5 etc. next to the base-station. By means of these signals the base-station can communicate with a mobile station (MS) 6 in that cell, which itself includes a radio transceiver. Each base station is connected to a mobile system controller (MSC) 7, which is linked in turn to the public telephone network 8. By means of this system a user of the MS 6 can establish a telephone call to the public network 8 via the BS in whose cell the MS is located.

The location of the MS could be fixed (for example if it is providing radio communications for a fixed building) or the MS could be moveable (for example if it is a hand portable transceiver or "mobile phone"). When the MS is moveable it may move between cells of the cellular radio system. As it moves from one cell (the "old cell") to another cell (the "new cell") there is a need to hand it over from communication with the BS of the old cell to the BS of the new cell without dropping the call due to a break in communications between the mobile station and the network. This process is known as handover. A need can also arise to hand over a MS whose location is fixed, for example if atmospheric conditions affect its communications with the old BS and call quality can be improved by handing it over to another BS or if there is a need to free up capacity of the old BS.

In a conventional cellular radio system handover is controlled automatically by the MSC. Handover can be initiated by the MS or the network dependent, for example, on the quality of the signalling between the MS and the old and new BSs.

When a new cellular network is being introduced it can take some time to install all the base-stations and associated apparatus. Therefore, there is a delay before the new network provides full geographical coverage. Figure 2 illustrates the situation: an existing cellular network provides full geographical coverage by means of cells 20-27 but the new cellular network provides incomplete geographical coverage by means of only cells 28 and 29. This presents a significant commercial problem for the operator of the new network. If the new network is launched for use before its geographical coverage is complete then customers will be dissatisfied by its inferior coverage to the old network. However, the cost of the infrastructure of the new network is high and no return can be gained on it until it is in use.

It has been proposed to tackle this problem by allowing mobile stations using the new network to be handed over to cells of the old network when they move outside the coverage of the new network. For instance, when a mobile station moves from 30 to 31 in figure 2 it could be handed over from the base station of cell 28 (in the new network) to that of cell 21 (in the old network). However, the base-stations of cells 28 and 21 are in different networks and are therefore not linked by a common MSC, so conventional handover processes cannot be used. One solution to this could be to modify the old network to allow it to support inter-network handover. However, modifying the old network would be expensive and inconvenient.

There is therefore a need for a new method for handover between two telecommunications networks.

According to the present invention there is provided a method for performing handover of a mobile station communicating in a first call via a first network to communication in a second call via a second network, comprising: generating a request for handover; establishing the second call between the first network and the mobile station via the second network; and transferring data communication between the mobile station and the first network from the first call to the second call.

The method preferably also comprises the step of releasing the first call after data communication between the mobile station and the first network has been transferred

from the first call to the second call. The said data communication is suitably communication of user data such as speech or other communication information.

The request for handover may be generated by the mobile station or the first network. Preferably the one of those entities generating the request transmits a message to the other of those entities to request the handover.

The mobile station may originate the second call. In that case it is preferred that the first network transmits to the mobile station data indicating an identification for the handover operation. Subsequently the mobile station may transmit to the second network data indicating that identification; and when the second call has been established the second network may transmit to the first network data indicating that identification. In response to receiving the identification in this way the first network may initiate transfer of the data communication from the first call to the second call.

The first network may originate the second call. In that case it is preferred that the mobile station transmits its identification in the second network (e.g. its MSISDN in the second network) to the first network and the first network uses that identification in originating the second call.

The geographical coverage of the second network may suitably be greater than that of the first network, at least in the region of the mobile station's location.

The first and second networks may suitably be cellular telephone networks. The mobile station may suitably be capable of communicating by radio with the first and second networks. The first and second calls may both be telephone calls. The mobile station may, for example, be a radio telephone.

The present invention will now be described by way of example with reference to the accompanying drawings, in which:

figure 1 shows schematically the configuration of a typical cellular radio telecommunications network;

figure 2 shows coverage of two overlapping telecommunications networks;

figure 3 illustrates a handover process;

figure 4 illustrates information flow for a mobile station triggered handover with a mobile terminated call;

figure 5 illustrates information flow for a network triggered handover with a mobile terminated call;

figure 6 illustrates information flow for a mobile station triggered handover with a mobile originated call; and

figure 7 illustrates information flow for a network triggered handover with a mobile originated call.

The handover process illustrated in figure 3 allows a mobile station 39 to be handed over between two telecommunications networks. In this illustration the mobile station moves from cell 40 to cell 41. Cell 40 is the cell of base-station 42 in network NW1. Base-station 41 is connected to the public telephone network 43 via an MSC 44 of network NW1. Cell 41 is the cell of base-station 45 in network NW2. Base-station 45 is connected to the public telephone network 43 via an MSC 46 of network NW2.

Initially the MS 39 is in communication with BS 42 and MSC 46 by means of a call 47 using the protocol of network NW1. When the MS moves away from the BS 42 it reaches a zone 48 where cells 40 and 41 overlap and the MS can communicate with both BS 42 and BS 45. Whilst the MS is in that overlap zone 48 it can be handed over from BS 42 to BS 45. The handover can be initiated by the mobile station, for example if it detects a greater signal strength or a lesser error rate for communications with BS 45 than with BS 42. Alternatively the handover can be initiated by the network, for example if it detects that communications between base-station 42 and mobile station 39 have a signal strength that falls below or an error rate that rises above pre-set thresholds, or if it is desired to free up capacity of base station 42 by handing the MS 39 off to BS 45.

The mobile station is capable of maintaining a call with a base-station of network NW1 at the same time as maintaining a call with a base-station of network NW2. Dual band mobile stations of this general type are well-known. Such mobile stations can make the normal location updates to both networks.

Once handover has been initiated, by the mobile station or the network, a second call 49 is established between the mobile station 39 and the MSC 46. This call passes over network NW1 via the base station 45. Meanwhile the original call 47 is maintained. Thus at this stage there are two calls in progress at once from the mobile switching centre of network NW1 to the mobile station 39. Once the second call 49 has been established network NW1 routes the data formerly being carried by the original call 47 over the second call 49. Then the original call 45 can be released. The mobile station 39 then communicates with the mobile switching centre of the network NW1 to which it was originally connected only via a base station of network NW2. Thus the mobile station has in effect been handed off to network NW2, although the call is still routed through the MSC 46 of network NW1. If the call passed onward to the public telephone network 43 from the MSC 46 (rather than to another mobile station in network NW1, for example) then this arrangement could be inefficient. To overcome this there could be provided means for optimising the routing of the call after handover has taken place, for example by routing the call to the public telephone network directly from the MSC of network NW2 rather than via that of NW1.

Figures 4 to 7 illustrate possible ways of implementing this type of handover.

Figure 4 shows the signalling used for a mobile station triggered handover when mobile terminated calls are used. Initially the mobile station is in communication with network NW1 over call 47. When the MS 39 discovers that inter-system handover is required it sends a handover request 50 to the MSC of network NW1. This handover request includes information that defines the identification number of the mobile station (its MSISDN) in network NW2. Then the MSC of network NW1 makes a new call (call 49) to that MSISDN number. This could be done using ISUP or TUP signalling. A request 51 for this new call reaches network NW2 which sets up the call with the mobile MS 39 in the usual way for a mobile terminated call - for example by means of page and page_response messages 52, 53. The new call 49 is then set up (at 54). When the new call 49 has been set up network NW2 returns the normal message (e.g. ISUP_connect message 55) to indicate this fact to the network NW1 that originated the call 49. The network NW1 can then issue a message (indicated as a handover_confirmation message 56) to the mobile station to confirm that

handover can now be made. Then the mobile station and the network NW1 connect call 47 to call 49 (at 57) so that user data that would formerly have been carried over call 47 is carried instead over call 49. Once all user data is being carried over call 49 then call 47 can be released (at 58). Handover is then complete.

Figure 5 shows the signalling used for a network triggered handover when mobile terminated calls are used. Initially the mobile station is in communication with network NW1 over call 47. When the network NW1 discovers that inter-system handover is required it sends a handover request 60 to the mobile station 39. In response to this handover request the mobile station 39 returns an acknowledgement signal (indicated as `handover_request_acknowledgement` signal 61) that includes information that defines the identification number of the mobile station (its MSISDN) in network NW2. Then the handover proceeds as described above in the scenario of figure 4 following receipt by network NW1 of the handover request 50. The MSC of network NW1 makes a new call (call 49) to that MSISDN number. This could be done using ISUP or TUP signalling. A request 62 for this new call reaches network NW2, which sets up the call with the mobile MS 39 in the usual way for a mobile terminated call - for example by means of `page` and `page_response` messages 63, 64. The new call 49 is then set up (at 65). When the new call 49 has been set up network NW2 returns the normal message (e.g. `ISUP_connect` message 66) to indicate this fact to the network NW1 that originated the call 49. The network NW1 can then issue a message (indicated as a `handover_confirmation` message 67) to the mobile station to confirm that handover can now be made. Then the mobile station and the network NW1 connect call 47 to call 49 (at 68) so that user data that would formerly have been carried over call 47 is carried instead over call 49. Once all user data is being carried over call 49 then call 47 can be released (at 69). Handover is then complete.

Figure 6 shows the signalling used for a mobile station triggered handover when mobile originated calls are used. Initially the mobile station 39 is in communication with network NW1 over call 47. When the MS 39 discovers that inter-system handover is required it sends a handover request 70 to the MSC of network NW1. The network NW1 replies with a handover request acknowledgement message 71 to the mobile station. This handover request acknowledgement message includes

information that defines a handover number assigned by the network NW1 to this handover operation. The mobile station 39 then makes a new call (call 49) to the network NW2, for example by means of a CC_setup message 72. In connection with that call the mobile station reports to the network NW2 the handover number that it has been given. This could be done by means of the CC_setup message itself. The new call 49 is then set up (at 73). When the new call 49 has been set up network NW2 returns a message (e.g. ISUP_connect message 74) to indicate this fact to the network NW1 that originated the new call 49. As part of this message or otherwise the network NW2 also reports to the network NW1 the handover number associated with the new call. On receiving this handover number from the network NW2 the network NW1 knows that the handover can be completed by means of the new call 49. The network NW1 can then issue a handover confirmation message 75 to the mobile station to confirm that handover can now be made. Then the mobile station and the network NW1 connect call 47 to call 49 (at 76) so that user data that would formerly have been carried over call 47 is carried instead over call 49. Once all user data is being carried over call 49 then call 47 can be released (at 77). Handover is then complete.

Figure 7 shows the signalling used for a network triggered handover when mobile originated calls are used. Initially the mobile station 39 is in communication with network NW1 over call 47. When the network NW1 discovers that inter-system handover is required it sends a handover request 80 to the mobile station 39. This handover request includes information that defines a handover number assigned by the network NW1 to this handover operation. The mobile station 39 then replies with a handover request acknowledgement message 81 to the network NW1 and makes a new call (call 49) to the network NW2, for example by means of a CC_setup message 82. In connection with that call the mobile station reports to the network NW2 the handover number that it has been given. This could be done by means of the CC_setup message itself. The new call 49 is then set up (at 83). When the new call 49 has been set up network NW2 returns a message (e.g. ISUP_connect message 84) to indicate this fact to the network NW1 that originated the new call 49. As part of this message or otherwise the network NW2 also reports to the network NW1 the handover number associated with the new call. On receiving this handover number from the network NW2 the network NW1 knows that the handover can be

completed by means of the new call 49. The network NW1 can then issue a handover confirmation message 85 to the mobile station to confirm that handover can now be made. Then the mobile station and the network NW1 connect call 47 to call 49 (at 86) so that user data that would formerly have been carried over call 47 is carried instead over call 49. Once all user data is being carried over call 49 then call 47 can be released (at 87). Handover is then complete.

One situation where this handover process could usefully be implemented is when a mobile station is being handed over from a network with incomplete geographical coverage to one with greater geographical coverage. For example, the network NW1 from which the mobile station is being handed over could be a localised network or a network in the course of construction; the network NW2 to which the mobile station is being handed over could be a more extensive or more established network. The networks could be of different core network types. One specific example is where one of the networks (e.g. network NW1) is a 2G network such as a PDC network and the other network (e.g. network NW2) is a 3G network such as an IMT-2000 network.

In the case of both mobile terminated calls (figures 4 and 5) and mobile originated calls (figures 6 and 7) there is no need for any change from conventional signalling in the network to which the mobile station is being handed over. This makes the handover method very convenient to implement since there is no need to modify the existing network. Thus only one of the networks needs specifically to support the handover method. In the case of mobile originated calls (figures 6 and 7), since the handover number could be an E.164 or E.163 number, to which the mobile station is calling, conventional signalling in network NW2 can support the return of that number to the network NW1.

When the network NW2 has a greater coverage than network NW1 it is likely that the need to hand over from network NW1 to network NW2 will be more common than the need to hand over from network NW2. Thus any inability to handover easily from network NW2 to network NW1 (i.e. in the opposite direction from that described in detail above), for example because such handover is not supported by network NW2, may not be significant.

The present invention may include any feature or combination of features disclosed herein either implicitly or explicitly or any generalisation thereof, irrespective of whether it relates to the presently claimed invention. In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

CLAIMS

1. A method for performing handover of a mobile station communicating in a first call via a first network to communication in a second call via a second network, comprising:
 - generating a request for handover;
 - establishing the second call between the first network and the mobile station via the second network; and
 - transferring data communication between the mobile station and the first network from the first call to the second call.
2. A method as claimed in claim 1, comprising the step of releasing the first call after data communication between the mobile station and the first network has been transferred from the first call to the second call.
3. A method as claimed in claim 1 or 2, wherein the mobile station generates the request for handover.
4. A method as claimed in claim 1 or 2, wherein the first network generates the request for handover.
5. A method as claimed in any preceding claim, wherein the mobile station originates the second call.
6. A method as claimed in claim 5, wherein:
 - the first network transmits to the mobile station data indicating an identification for the handover operation;
 - the mobile station transmits to the second network data indicating that identification; and
 - when the second call has been established the second network transmits to the first network data indicating that identification.
7. A method as claimed in any of claims 1 to 4, wherein the first network originates the second call.

8. A method as claimed in claim 7, wherein the mobile station transmits its identification in the second network to the first network and the first network uses that identification in originating the second call.

9. A method as claimed in any preceding claim, wherein the geographical coverage of the second network is greater than that of the first network.

10. A method as claimed in any preceding claim, wherein the first network is an IMT-2000 network.

11. A method as claimed in any preceding claim, wherein the second network is a PDC network.

12. A method as claimed in any preceding claim wherein the first and second networks are cellular telephone networks.

13. A method as claimed in any preceding claim, wherein the mobile station is capable of communicating by radio with the first and second networks.

14. A method for performing handover substantially as herein described with reference to figures 3 to 7 of the accompanying drawings.

ABSTRACT**INTER-SYSTEM HANDOVER**

A method for performing handover of a mobile station communicating in a first call via a first network to communication in a second call via a second network, comprising: generating a request for handover; establishing the second call between the first network and the mobile station via the second network; and transferring data communication between the mobile station and the first network from the first call to the second call.

Figure 3

Fig. 1

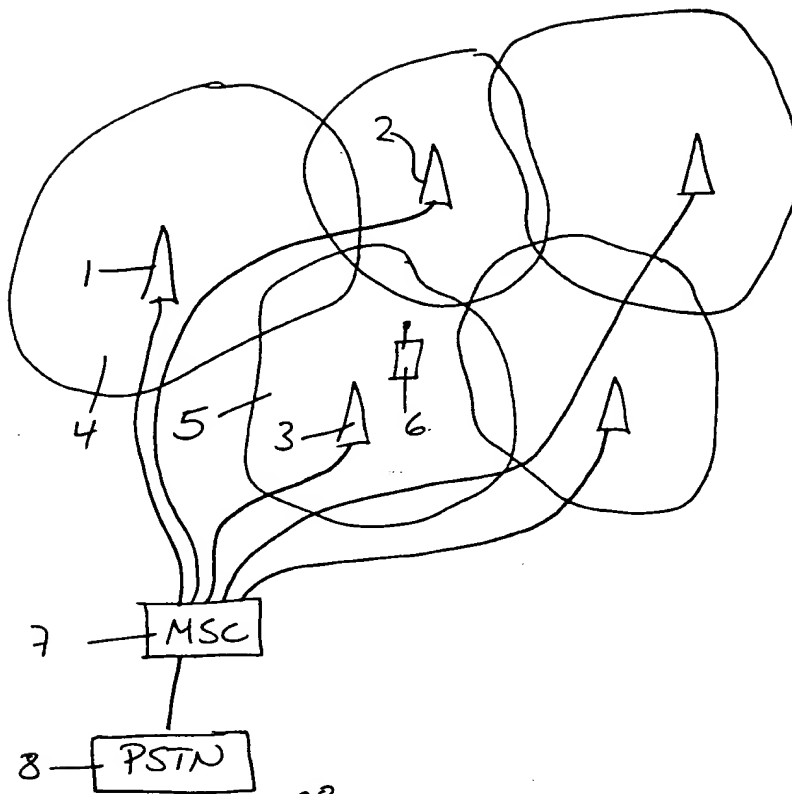


Fig. 2

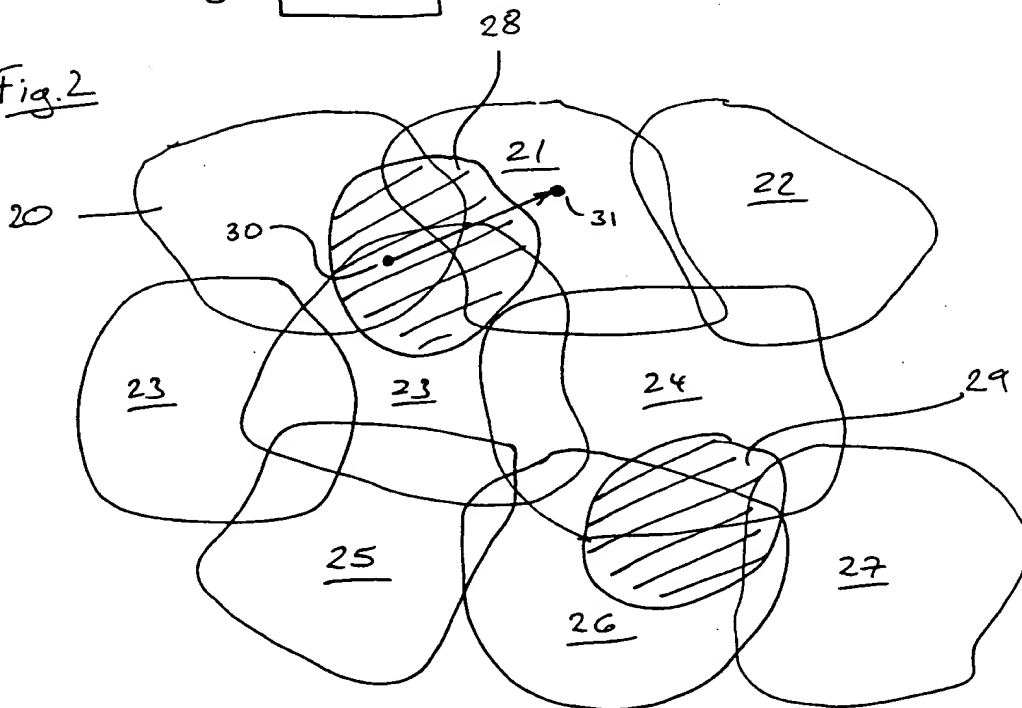




Fig. 3

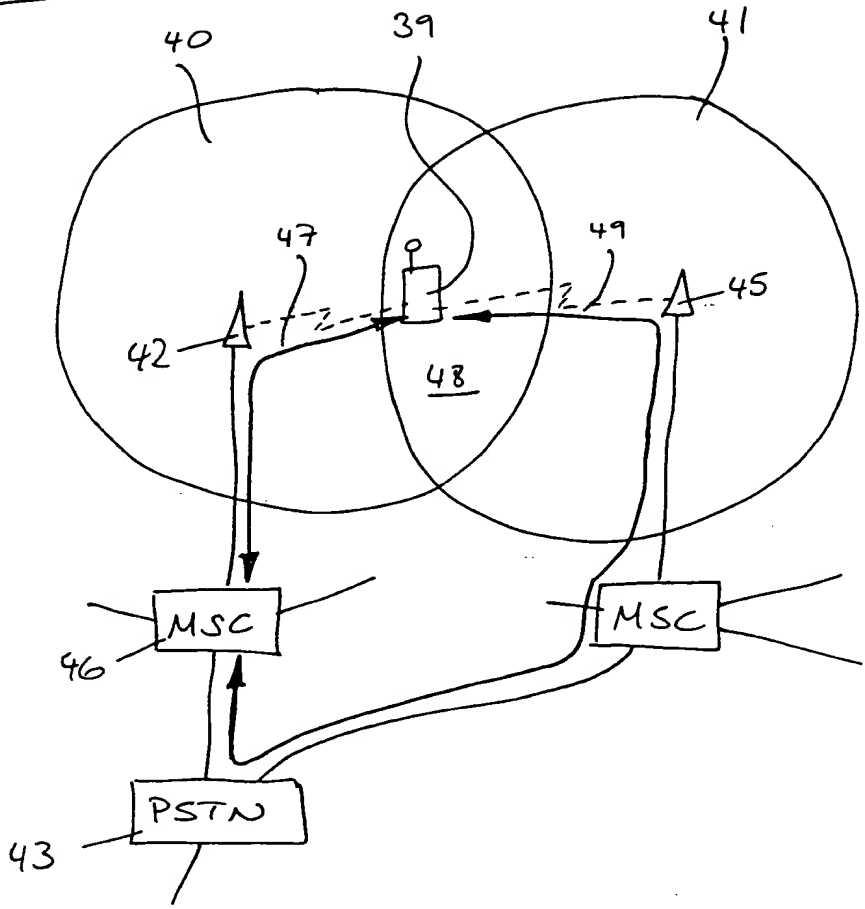




Fig. 4

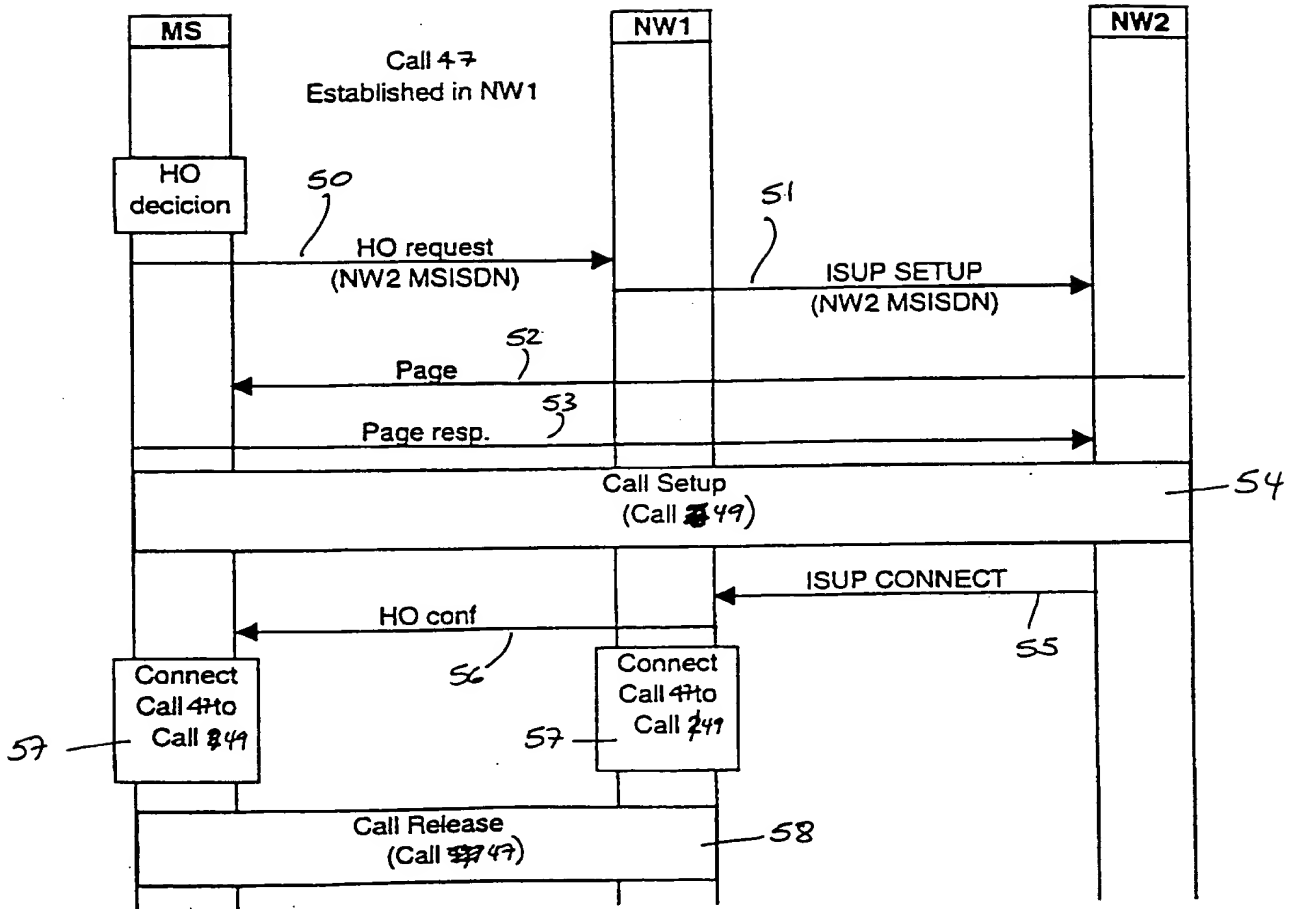


Figure 11 Scenario 1 (MS Triggered HO with MT call)



Fig. 5

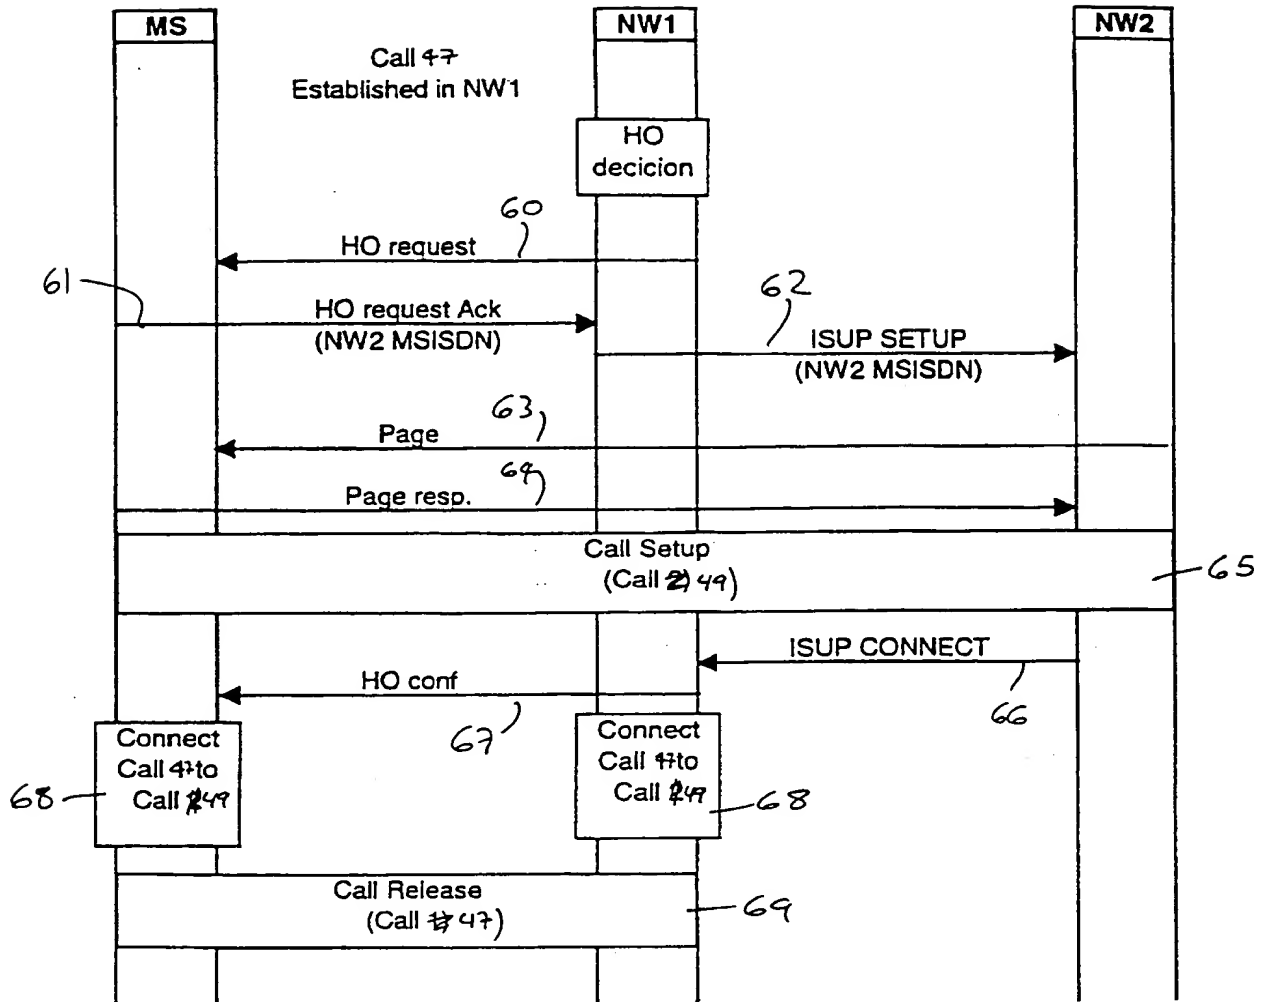


Figure 2: Scenario 2 (NW Triggered HO with MT call)



Fig. 6

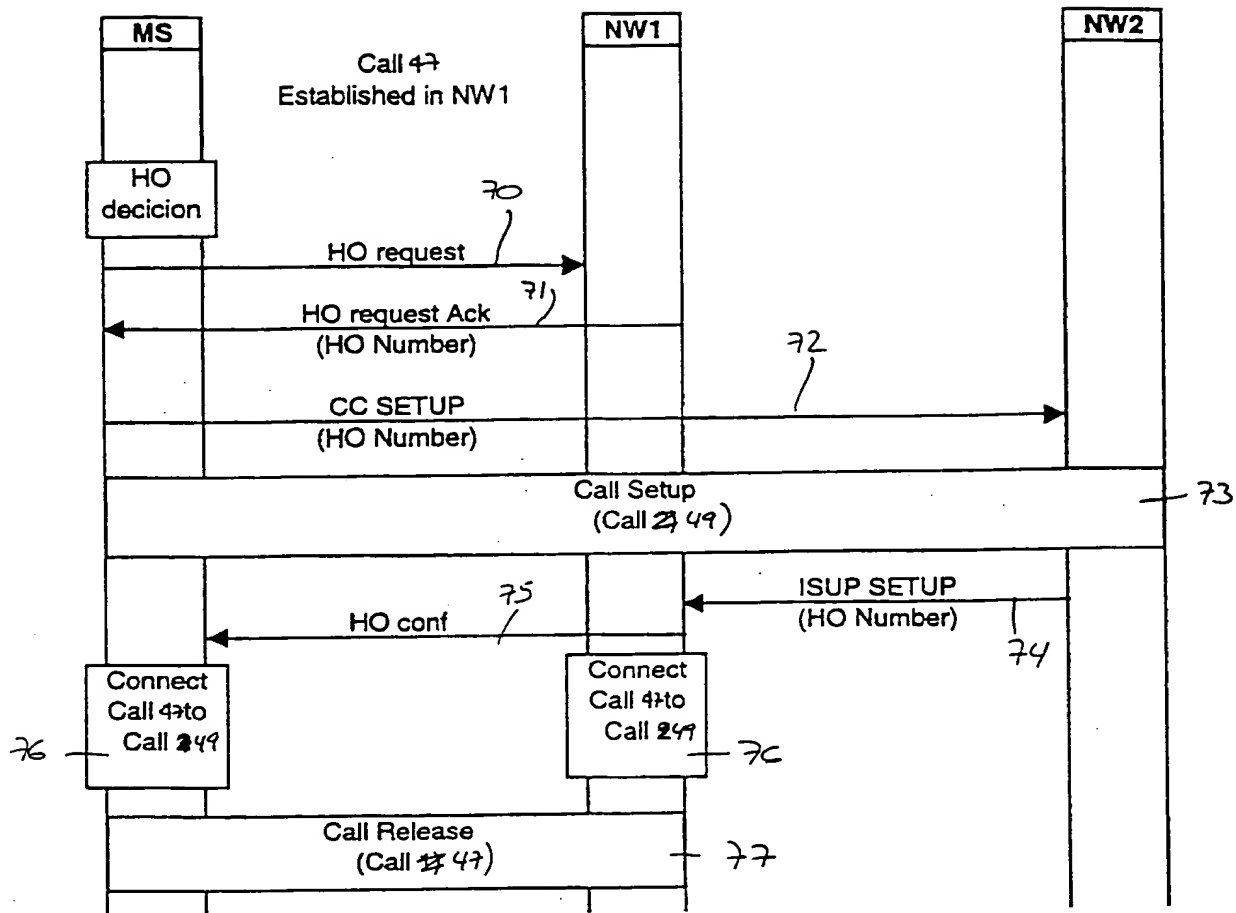


Figure 3: Scenario 3 (MS Triggered HO with MO call)



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

